
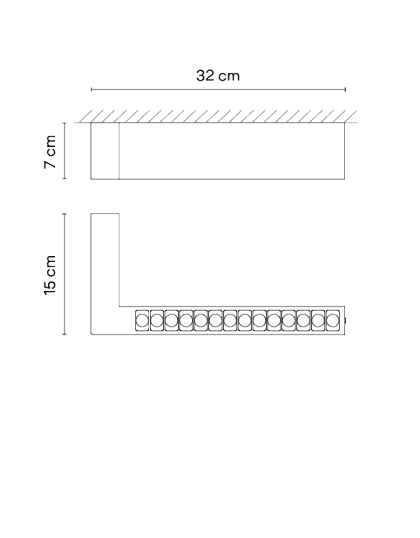


The Offset ceiling light is characterised by its linear design and easy surface installation. The Low-Glare High Efficiency linear model allows for highly energy efficient installations and minimal glare. The structure is aluminium with powerful Led light strips, a versatile fitting offering static and Tunable White lighting options to customise spaces according to individual project requirements. A stylish and sustainable solution for a warm and light filled ambience.

Model Sheet

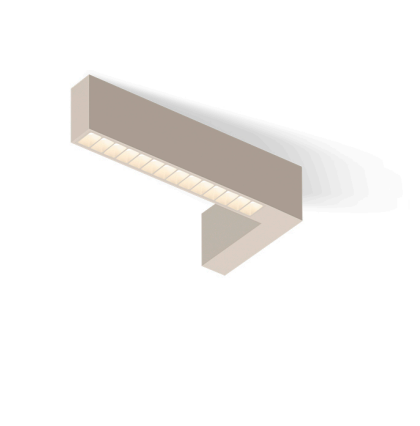


Finish	<div><div></div>23 Warm White NCS S 0502-Y50R</div> <div><div></div>24 Beige M1 NCS S 2005-Y50R</div> <div><div></div>90 Black NCS S 8500N</div>
LED temperature color	2700 K / 3000 K / 3500 K / Tunable White
Dimming	PUSH / PROTOPIXEL / CASAMBI / DALI
Installation type	Surface

Materials	Box: Aluminum Diffuser: PE- Polyethylene Diffuser: PC- Polycarbonate
Light source	1 x LED STRIP 13,7W 650mA <div>E</div>
LED	CRI>90 1674 lm 122.63 2700 K / 3000 K / 3500 K / Tunable White
Driver	Constant Current 650 220~240 V V 50~60 Hz HZ <div><div></div><div></div><div>Dimmable</div><div>LED</div><div>IP20</div><div>50-60Hz</div><div>PUSH</div></div>
Application	Ceiling Lamps
Packaging	Box Gross weighth Net weighth

Lighting effect

Linear High Efficiency - Low Glare

High energy efficiency and low glare levels
UGR<19 for linear light applications



Photometric Data



All of our products come with a five-year warranty. Check our legal terms at www.vibia.com/warranty