

# SISTEMA FONDA

Продажа дизайнерской мебели,  
 светотехники и аксессуаров  
 по всей России

8 (800) 500-70-36  
 hello@barcelonadesign.ru  
 www.barcelonadesign.ru

**GENERAL DESCRIPTION:**

ADI FAD Selection 1995  
 It consists of the repetition of light sources on a large scale, allowing for the creation of personalized compositions for every space, through straight and broken lines.

**APROXIMATEWEIGHT (unpacked):**

- (1) Structure for one lampshade 0,5 kg / 1.1 lb
- (2) Structure for three lampshade 1,9 kg / 4.1 lb
- (3) End connection 0,2 kg / 0.4 lb
- (4) Intermediate connection 0,2 kg / 0.4 lb
- (5) 90° angle connection 0,3 kg / 0.6 lb
- (6) S&C Ceiling rose 0,4 kg / 0.8 lb
- (7) Electric cable

**TECHNICAL CHARACTERISTICS:**

Bulbholder: E27 / E26  
 Light Source recommended:  
 LED\*: 12W. EEC: A.  
 \*This luminaire is not UL certified with LED bulbs.  
 Compact fluorescent: 20W. EEC: A.  
 Incandescent: 100W.  
 Max. hgt. 155 mm / 4.3"

EUROPE (Voltage)	230Vac	50 Hz
USA / CANADA (Voltage)	120Vac	60 Hz
JAPAN (Voltage)	100Vac	60 Hz

Light source not included.  
 Fixture only suitable for indoor use.

**STRUCTURE:**

Satin nickel tubular structure for one or three lampshades.  
 To create a suspension system must be incorporated: end connection, intermediate connection and / or 90° angle connection.  
 S&C satin finished nickel ceiling rosette.

**LAMPSHADES:**

Can be combined with P1, P2, P3 and M1 lampshades.

**MAINTENANCE:**

Clean with a smooth cloth. It is advised not to use any ammonia, solvent or abrasive products.

**OTHERS:**

The electric wire lenght is: 3m / 118.1". (7)  
 Maximum 1200W per line (6A). One connection per line.  
 Suitable for Outlet Box.  
 The fixture are delivered in different packets.  
 The assembly instructions are delivered with the product.

**REGULATIONS:**


The luminaries comply with the following regulations:




IP 20 UNE-EN 60598 ; UNE-EN 55015 ; UNE-EN 60529




No Class 2 Dry location only UL 1598 E-353545

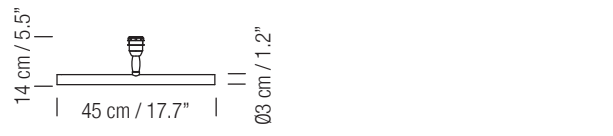



(1) Structure for one lampshade

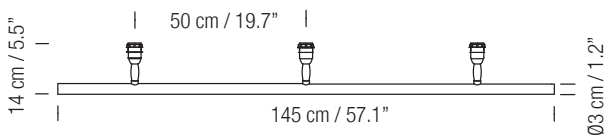

(2) Structure for three lampshade

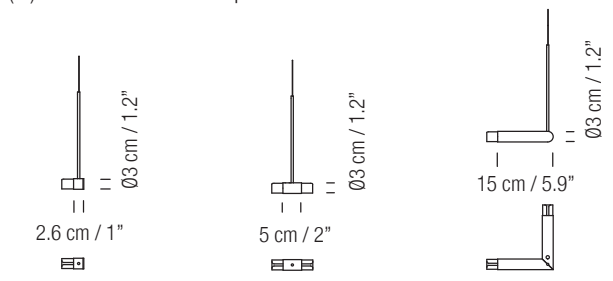

(3) End connection (4) Intermediate connection (5) 90° angle connection

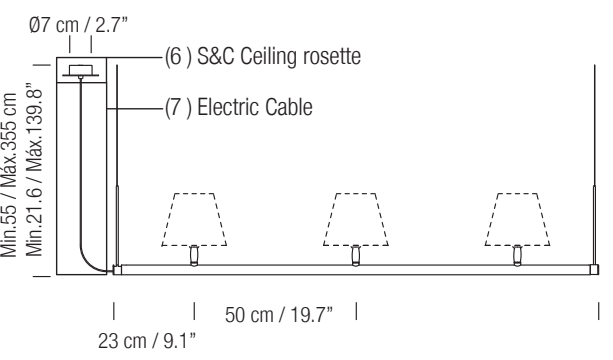

Example