


Astros



Milan

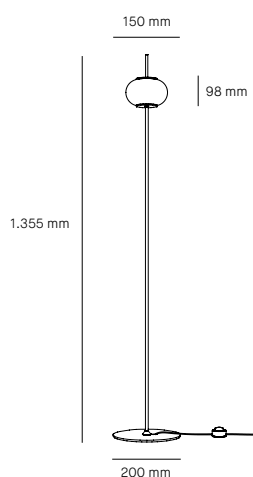

Astros 135 F.

Ø 200 | H. 1.355 mm
2 x G9 Bulb retrofit



LED 4,8 W Code 2024 | CRI 80
600 (x2) lumens | 2.700 K
Not dimmable




LED 3,5 W Code 2990 | CRI 80
350 (x2) lumens | 2.700 K
Dimmable
Class I: Basic insulation

Finishes

6933 ● Matt black lacquering
(RAL 9005)

Accessories

2400 Aerial dimmer
9416 Spare dimmer



DOWNLOADS

Catalogue

[Astros](#)

3D Files

[6933 + 2400 + 9416](#)

3D Max Files

[6933 + 2400 + 9416](#)

Assembly instructions

[6933 + 2400 + 9416](#)

Photometric curve

[6933 + 2400 + 9416](#)


Economic efficiency index

[6933 + 2400 + 9416](#)

Contemplating
the constellations

Satin triplex opal blown glass diffuser shade. Upper and lower supports of the screen in injected zamak. Matt black lacquer finish (RAL 9005). Interior support for lamp holder G9 (x2) made

of injected zamak. Steel tube and base. Matt black lacquer finishes (RAL9005). Air switch included in the 2-meter cable. Possibility of adapting aerial dimmer.

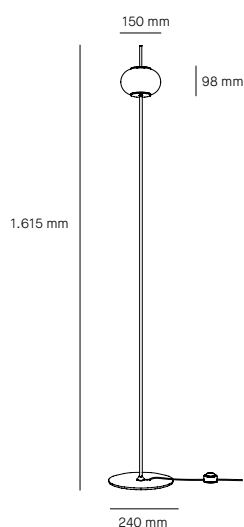

Astros 160 F.

Ø 240 | H. 1.615 mm
2 x G9 Bulb retrofit



LED 4,8 W Code 2024 | CRI 80
600 (x2) lumens | 2.700 K
Not dimmable




LED 3,5 W Code 2990 | CRI 80
350 (x2) lumens | 2.700 K
Dimmable
Class I: Basic insulation

Finishes

6934 ● Matt black lacquering
(RAL 9005)

Accessories

2400 Aerial dimmer
9416 Spare dimmer



DOWNLOADS

Catalogue

[Astros](#)

3D Files

[6934 + 2400 + 9416](#)

3D Max Files

[6934 + 2400 + 9416](#)

Assembly instructions

[6934 + 2400 + 9416](#)

Photometric curve

[6934 + 2400 + 9416](#)

Economic efficiency index

[6934 + 2400 + 9416](#)

Satin triplex opal blown glass diffuser shade. Upper and lower supports of the screen in injected zamak. Matt

black lacquer finish (RAL 9005). Interior support for lamp holder G9 (x2) made of injected zamak. Steel tube and base.

Matt black lacquer finishes (RAL 9005). Air switch included in the 2-meter cable. Possibility of adapting aerial dimmer.