

TECHNICAL CHARACTERISTICS

MBAI200E

Bai




Steel table

Bai steel table, with its unique crossed frame. Its steel frame, rationalist and futuristic, is here to conquer any space.

DESIGNED BY ANDER LIZASO



ondarreta

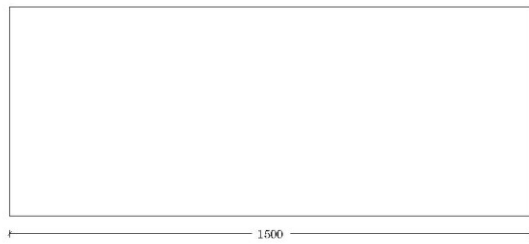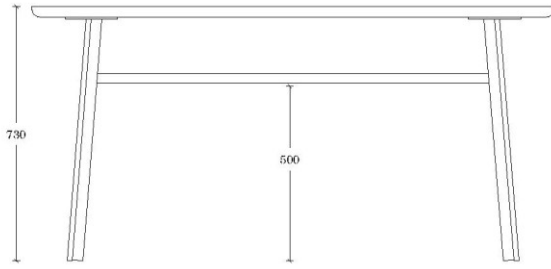

DIMENSIONS

Height: 74 cm (29,1")
Free height: 71 cm (28")

150 cm x 80 cm (59"x31,5") [width x depth]

180 cm x 80 cm (70.9"x31,5") [width x depth]

200 cm x 90 cm (78.7"x35,4") [width x depth]

240 cm x 90 cm (94.5"x31,5") [width x depth]

WEIGHT

38 kg [83,8 lb]

43 kg [94,8 lb]

51 kg [112.4lb]

60 kg [132.3lb]

PACKAGING

150 cm x 80 cm

box 1: 165 cm x 90 cm x 15 cm (65" x 35,4" x 5,9")

box 2: 100 cm x 60 cm x 15 cm (39,4" x 23,6" x 5,9")

180 cm x 80 cm

box 1: 195 cm x 90 cm x 15 cm (76,8" x 35,4" x 5,9")

box 2: 100 cm x 60 cm x 15 cm (39,4" x 23,6" x 5,9")

200 cm x 90 cm

box 1: 215 cm x 100 cm x 15 cm (84,6" x 39,4" x 5,9")

box 2: 100 cm x 60 cm x 15 cm (39,4" x 23,6" x 5,9")

240 cm x 90 cm

box 1: 255 cm x 100 cm x 15 cm (100,4" x 39,4" x 5,9")

box 2: 100 cm x 60 cm x 15 cm (39,4" x 23,6" x 5,9")

ACCESORIES

Access hole

Top Access (white or black)

Top Access + Standard power/data (white or black)

Vertical cable tidy (white or black)

ORIGIN

100% Made in Europe

DESIGN

Ander Lizaso



COMPONENTS

LEGS

Material

30 mm (0.98") side and 2 mm (0.08") thickness cold laminated E-220 quality (EN-10305 Normative) steel tube.
Tensile Strength > 310 N/mm² (44,960 psi);
Elastic Limit > 220 N/mm² (31,900 psi); Elongation > 23%

Finish

Colour epoxy

TABLETOP

Laminate + birch plywood

High pressure laminate glued and pressed in high temperatures on a Birch plywood wood table with beveled chants.

Arpa fénix + birch plywood

Combination of arpa fenix sheet and beveled birch plywood. Arpa fenix is an extremely opaque, anti-fingerprint and nanotechnological material that heals superficial micro-scratches.

Technical characteristics:

Urea-formol glue: low formaldehyde emission (E1 European Normative)
The wood has the PEFC certificate.

METAL FINISHES

EPOXYS

Powder covering formulated with polyester resins, with good both mechanical and chemical properties, outdoor maximum resistance and noxious compounds free. Electrostatic application and oven cured at 200°C (392°F).

Technical characteristics:

Thickness (ISO 2360): between 60 and 90 µm.
Adherence (ISO 2409): Grade: 0 (maximum adherence)