


Model Sheet

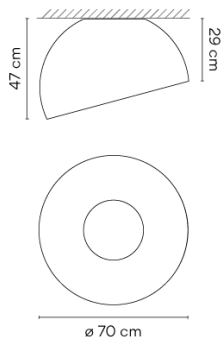

Finish

- 58 Cream
RAL 7044
- 93 White
RAL 9016
- 18 Graphite
ADAPTA RF 9913 WX

LED temperature color

2700 K / 3500 K / 4000 K

Dimming

Casambi / Push; 1-10V; DALI-2

Installation type

Surface Canopy

Materials

Shade: Wood

Light source

1 x LED PLATE 26W 500mA



LED

CRI>90 2068 lm 109
2700 K / 3500 K / 4000 K

Driver

Constant Current 500 110~240
V V 50~60 Hz HZ



Dimmable **LED**

IP20 **Bi-volt** **50-60Hz**

Application

Ceiling Lamps


Packaging

1 Box
0.593 m x 0.785 m x 0.785 m
Gross weight 20.6
Net weight 14
Vol. 0.3654



Lighting effect

General lighting

Lamp for general lighting that equally distributes the light in all directions.



Photometric Data

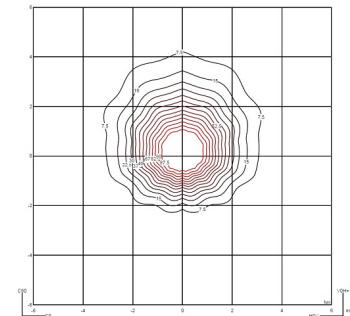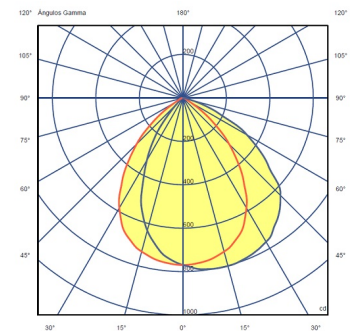

Efficiency 51.35 lm/W
Coordinate System CG
Total Flux 1343.81 lm
Maximum Value 801.14 cd

Other Applications

