


Dau Spot



Milan



Dau 80 F CC.

Ø80 x 80 mm | H. 184 mm

1 x COB LED 

956 lumens | 2.700K | CRI 90

3-step MacAdam

Driver CC included

Dimmable leading and trailing edge

10-100%

PF. 0,90

Ripple < 10%

Class I: Basic insulation

Finishes

- 6880 ● Brushed aluminium
- 6881 ● Matt white lacquering (RAL 9016)
- 6882 ● Black satin aluminium

DOWNLOADS

Catalogue

[6880/6881/6882](#)

3D Files

[6880](#)

[6881](#)

[6882](#)

3D Max Files

[6880](#)

[6881](#)

[6882](#)

Assembly instructions

[6880/6881/6882](#)

Photometric curve

[6880/6881/6882](#)


Economic efficiency index

[6880/6881/6882](#)

Pure geometry.


Dimmable version in DALI system or 1-10 V on request. Extruded aluminium outer body. Finishes in anodised brushed aluminium, white lacquer (RAL 9016) and satin brushed aluminium in black. Injected aluminium LED


support and heat sink. Finishes in mat metallic grey (similar to RAL 9006), white lacquer (RAL 9016) and satin black (RAL 9005). Inner bodies: injected aluminium base mount.



Dau 80 F GU10 W.

Ø80 x 80 mm | H. 184 mm
1 x GU10 Bulb retrofit

Led 8W Ø63mm 
Code 2053 | CRI 80
720 lumens | 2.700K

Led 8W Ø50mm 
Code 2123 | CRI 80
700 lumens | 2.700K
Dimmable

Class I: Basic insulation

Finishes

- 6028 ● Brushed aluminium
- 4028 ● Matt white lacquering (RAL 9016)
- 1028 ● Black satin aluminium

Extruded aluminium outer body. Finishes in anodised brushed aluminium, white lacquer (RAL 9016) and satin brushed aluminium in black.

Decorative cover, lampshade in injected polycarbonate. Finishes in metallic grey lacquer (similar to RAL 9006), white lacquer (RAL 9016) and

black lacquer (RAL 9005). Inner bodies: injected aluminium base mount

DOWNLOADS

Catalogue

[6028/4028/1028](#)

3D Files

[6028](#)
[4028](#)
[1028](#)

3D Max Files

[6028](#)
[4028](#)
[1028](#)

Assembly instructions



[6028/4028/1028](#)

Photometric curve


[6028/4028/1028](#)

Economic efficiency index

[6028/4028/1028](#)




Dau 80 F 1P CC T.

Ø80 x 80 mm | H. 165 mm
 1 x COB LED 
 956 lumens | 2.700K | CRI 90
 3-step MacAdam
 Driver CC included
 Dimmable leading and trailing edge
 10-100%
 PF. 0,90
 Ripple < 10%
 Class I: Basic insulation
 One-phase adapter

Finishes

- 6886 ● Brushed aluminium
- 6887 ● Matt white lacquering (RAL 9016)
- 6888 ● Black satin aluminium

Dau 80 F 3P CC T.

Ø80 x 80 mm | H. 165 mm
 1 x COB LED 
 956 lumens | 2.700K | CRI 90
 3-step MacAdam
 Driver CC included
 Dimmable leading and trailing edge
 10-100%
 PF. 0,90
 Ripple < 10%
 Class I: Basic insulation
 Three-phase adapter

Finishes

- 6889 ● Brushed aluminium
- 6890 ● Matt white lacquering (RAL 9016)
- 6891 ● Black satin aluminium

DOWNLOADS

Catalogue

[6886/6887/6888](#)
[6889/6890/6891](#)

3D Files

[6886](#) [6889](#)
[6887](#) [6890](#)
[6888](#) [6891](#)

3D Max Files

[6886](#) [6889](#)
[6887](#) [6890](#)
[6888](#) [6891](#)

Photometric curve

[6886/6887/6888](#)
[6889/6890/6891](#)




Economic efficiency index

[6886/6887/6888](#)
[6889/6890/6891](#)

Dimmable version in DALI system or 1-10 V on request. Extruded aluminium outer body. Finishes in anodised brushed aluminium, white lacquer (RAL 9016)


and satin brushed aluminium in black. Injected aluminium LED support and heat sink. Finishes in mat metallic grey (similar to RAL 9006), white lacquer


(RAL 9016) and satin black (RAL 9005). Inner bodies: injected aluminium base mount.

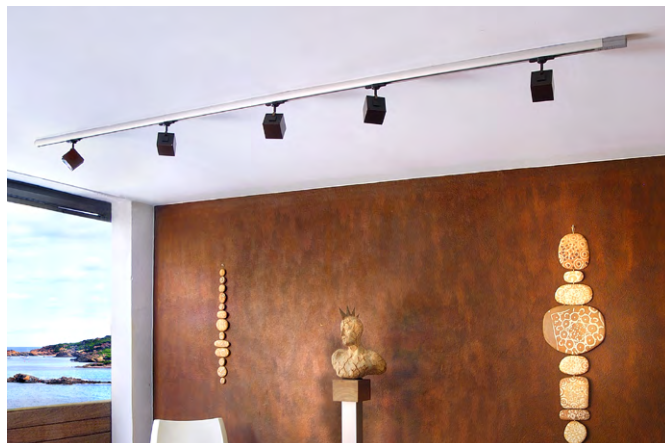

Dau 80 F 1P GU10 T.

Ø80 x 80 mm | H. 162 mm
1 x GU10 Bulb retrofit

Led 8W Ø63mm 
Code 2053 | CRI 80
720 lumens | 2.700K

Led 8W Ø50mm 
Code 2123 | CRI 80
700 lumens | 2.700K
Dimmable


Class I: Basic insulation
One-phase adapter


Finishes

- 3163 ● Brushed aluminium
- 1164 ● Matt white lacquering (RAL 9016)
- 5164 ● Black satin aluminium

Dau 80 F 3P GU10 T.

Ø80 x 80 mm | H. 162 mm
1 x GU10 Bulb retrofit

Led 8W Ø63mm 
Code 2053 | CRI 80
720 lumens | 2.700K

Led 8W Ø50mm 
Code 2123 | CRI 80
700 lumens | 2.700K
Dimmable

Class I: Basic insulation
Three-phase adapter

Finishes

- 6163 ● Brushed aluminium
- 4164 ● Matt white lacquering (RAL 9016)
- 6164 ● Black satin aluminium

DOWNLOADS

Catalogue

[3163/1164/5164](#)
[6163/4164/6164](#)

3D Files

[3163](#) [6163](#)
[1164](#) [4164](#)
[5164](#) [6164](#)

3D Max Files

[3163](#) [6163](#)
[1164](#) [4164](#)
[5164](#) [6164](#)

Photometric curve

[3163/1164/5164](#)
[6163/4164/6164](#)

Economic efficiency index

[3163/1164/5164](#)
[6163/4164/6164](#)

Extruded aluminium outer body. Finishes in anodised brushed aluminium, white lacquer (RAL 9016) and satin brushed aluminium in black.

Decorative cover, lampshade in injected polycarbonate. Finishes in metallic grey lacquer (similar to RAL 9006), white lacquer (RAL 9016) and

black lacquer (RAL 9005) Inner bodies: injected aluminium base mount.