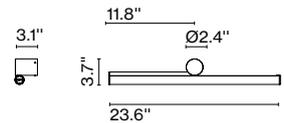# Ambrosia
Ciszak Dalmas

Its design stems from a tubular structure with gentle lines that attaches to the ceiling, allowing the light to descend and gently illuminate any type of project. It is this diffuse light that fills the space, adding beauty.

Its linear and unique design, a nearly flat segment of light, was made modular and asymmetric to create a soft and surprising lighting system.

Ambrosia A 60 Left

Code	Finish	Wattage	Luminaire	CCT	CRI
A704-115-15-22K	● Matt Gold	LED SMD 24Vdc 9.6W	1058lm	2200K	CRI90
A704-115-15-27K	● Matt Gold	LED SMD 24Vdc 9.6W	1014lm	2700K	CRI90
A704-115-15-30K	● Matt Gold	LED SMD 24Vdc 9.6W	1028lm	3000K	CRI90
A704-115-16-22K	● Black	LED SMD 24Vdc 9.6W	1058lm	2200K	CRI90
A704-115-16-27K	● Black	LED SMD 24Vdc 9.6W	1014lm	2700K	CRI90
A704-115-16-30K	● Black	LED SMD 24Vdc 9.6W	1028lm	3000K	CRI90

Dimmable: Based on specified driver
Integrated dimmer: No
Dimming protocols: Based on specified driver

Materials
Structure: Aluminum
Diffuser: Methacrylate
Canopy: Aluminum / Steel
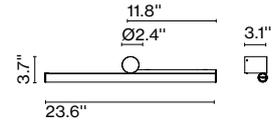
Suitable for damp locations

LED included

(Dimmable)   cETLus   Under approval process. For latest
certification status check the spec sheet.

3.1''   11.8''
Ø2.4''
3.7''
23.6''

Ambrosia A 60 Right

Code	Finish	Wattage	Luminaire	CCT	CRI
A704-116-15-22K	● Matt Gold	LED SMD 24Vdc 9.6W	1058lm	2200K	CRI90
A704-116-15-27K	● Matt Gold	LED SMD 24Vdc 9.6W	1014lm	2700K	CRI90
A704-116-15-30K	● Matt Gold	LED SMD 24Vdc 9.6W	1028lm	3000K	CRI90
A704-116-16-22K	● Black	LED SMD 24Vdc 9.6W	1058lm	2200K	CRI90
A704-116-16-27K	● Black	LED SMD 24Vdc 9.6W	1014lm	2700K	CRI90
A704-116-16-30K	● Black	LED SMD 24Vdc 9.6W	1028lm	3000K	CRI90

Dimmable: Based on specified driver
Integrated dimmer: No
Dimming protocols: Based on specified driver

Materials
Structure: Aluminum
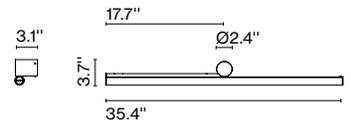Diffuser: Methacrylate
Canopy: Aluminum / Steel

Suitable for damp locations

LED included

Dimmable   ᶜ(ETL)ᵁˢ Under approval process. For latest
certification status check the spec sheet.

11.8"
Ø2.4"
3.1"
3.7"
23.6"

Ambrosia A 90 Left

Code	Finish	Wattage	Luminaire	CCT	CRI
A704-117-15-22K	● Matt Gold	LED SMD 24Vdc 14.4W	1587lm	2200K	CRI90
A704-117-15-27K	● Matt Gold	LED SMD 24Vdc 14.4W	1521lm	2700K	CRI90
A704-117-15-30K	● Matt Gold	LED SMD 24Vdc 14.4W	1692lm	3000K	CRI90
A704-117-16-22K	● Black	LED SMD 24Vdc 14.4W	1587lm	2200K	CRI90
A704-117-16-27K	● Black	LED SMD 24Vdc 14.4W	1521lm	2700K	CRI90
A704-117-16-30K	● Black	LED SMD 24Vdc 14.4W	1692lm	3000K	CRI90

Dimmable: Based on specified driver
Integrated dimmer: No
Dimming protocols: Based on specified driver

Materials
Structure: Aluminum
Diffuser: Methacrylate
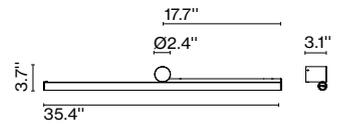Canopy: Aluminum / Steel

Suitable for damp locations

LED included

Dimmable   ᶜ(ETL)ᵁˢ Under approval process. For latest
certification status check the spec sheet.

17.7"
3.1"
Ø2.4"
3.7"
35.4"

Ambrosia A 90 Right

Code	Finish	Wattage	Luminaire	CCT	CRI
A704-118-15-22K	● Matt Gold	LED SMD 24Vdc 14.4W	1587lm	2200K	CRI90
A704-118-15-27K	● Matt Gold	LED SMD 24Vdc 14.4W	1521lm	2700K	CRI90
A704-118-15-30K	● Matt Gold	LED SMD 24Vdc 14.4W	1692lm	3000K	CRI90
A704-118-16-22K	● Black	LED SMD 24Vdc 14.4W	1587lm	2200K	CRI90
A704-118-16-27K	● Black	LED SMD 24Vdc 14.4W	1521lm	2700K	CRI90
A704-118-16-30K	● Black	LED SMD 24Vdc 14.4W	1692lm	3000K	CRI90

Dimmable: Based on specified driver
Integrated dimmer: No
Dimming protocols: Based on specified driver

Materials
Structure: Aluminum
Diffuser: Methacrylate
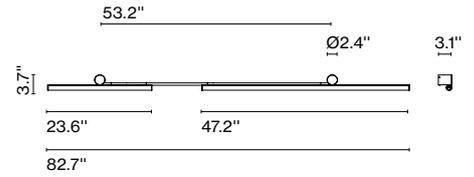Canopy: Aluminum / Steel

Suitable for damp locations

LED included

Dimmable   ᶜ(ETL)ᵁˢ Under approval process. For latest
certification status check the spec sheet.

17.7"
Ø2.4"
3.1"
3.7"
35.4"

Ambrosia A 210

| Code	Finish	Wattage	Luminaire	CCT	CRI
A704-121-15-22K	● Matt Gold	LED SMD 24Vdc 28.8W	2802lm	2200K	CRI90
A704-121-15-27K	● Matt Gold	LED SMD 24Vdc 28.8W	2812lm	2700K	CRI90
A704-121-15-30K	● Matt Gold	LED SMD 24Vdc 28.8W	2865lm	3000K	CRI90
A704-121-16-22K	● Black	LED SMD 24Vdc 28.8W	2802lm	2200K	CRI90
A704-121-16-27K	● Black	LED SMD 24Vdc 28.8W	2812lm	2700K	CRI90
A704-121-16-30K	● Black	LED SMD 24Vdc 28.8W	2865lm	3000K	CRI90

Dimmable: Based on specified driver
Integrated dimmer: No
Dimming protocols: Based on specified driver

Materials
Structure: Aluminum
Diffuser: Methacrylate
Canopy: Aluminum / Steel

Suitable for damp locations

LED included

(Dimmable) (ᴄ ETL ᵤₛ) Under approval process. For latest
certification status check the spec sheet.

53.2"
Ø2.4"
3.1"
3.7"
23.6"
47.2"
82.7"

Disk Accessory

Product type: Accessory
Accessory used to install the luminaire on
Jbox. Two units are necessary for Ambrosia
A 210.

Code	Finish
A704-128-15	● Matt Gold
A704-128-16	● Black

Materials
Structure: Metal

ø4.3"
ø0.3"

Power supply - Dimmable

Code	Description	Dimming	Class	Luminaire
968-230	Power supply 60W - 24V	0-10V	2	The installation and location of the remote LED driver must be in accordance with the specific regulations of each country and will be the exclusive responsibility of the installation company.

Materials
Structure: Metal

(ᴄ Uᴸ ᵤₛ)

marsetusa@marset.com
www.marset.com

Collection

Download Photometric data file (LDT or IES)
2D, 3D, Photometric Data
Assembly instructions