

Array
Flamingo Mini

VIBIA

VIBIA

See terms of sale in the
current general price list

Array
6

Flamingo Mini
16

Array

Design by Umut Yamac

A striking pendant of impressive proportions, Array is an exploration of thread and its potential to create lightweight and dynamic sculptures of light.

Pendants

Height 70 cm



Ø 37 cm


1800



Ø 55 cm


1815

Height 110 cm




Ø 37 cm

1805




Ø 55 cm

1820



Ø 83 cm

1830



Ø 124 cm

1840

Height 190 cm



Ø 37 cm

1810



Ø 55 cm

1825



Ø 83 cm

1835



Ø 124 cm

1845

Height 70 cm



Ø 55 cm

1850

Height 110 cm



Ø 55 cm

1855



Ø 83 cm

1865



Ø 124 cm

1875

Height 190 cm



Ø 55 cm

1860



Ø 83 cm


1870



Ø 124 cm

1880

1800



- Finishes (threads)**
- **24/** __ Beige M1 (NCS S 2005-Y50R)
 - **37/** __ Terra Red (NCS S4040-Y70R)
 - **47/** __ Green L1 (NCS S 4005-G80Y)
- LED Colour Temperature**
- /1_ 2700 K CRI >90 2662 lm 121 lm/W

- Control**
- 1800** __ / __ **3**
1-10V
- 1800** __ / __ **D**
Push; DALI-2
- 1800** __ / __ **Z**
Casambi

- Finishes (rings and canopy)**
- **Black** (NCS S 8500-N)

Materials
Upper ring: Aluminum. Bottom ring: Brass.
Diffuser: PC- Polycarbonate. Threads: PES FR.

Light Source and electronics
1 x LED STRIP 22W 48V
Constant Voltage 48V
90-305Vac 50/60Hz

Packaging
1 Box 0,62 x 0,62 x 0,12 m
Vol 0,0461 m³
Gross weight 7 Kg Net weight 4,8 Kg




Multi-volt **Dimmer**

Select Electrical connection

- _10 Surface
- _24 Built-in S
- _31 Remote Micro

1805



- Finishes (threads)**
- **24/** __ Beige M1 (NCS S 2005-Y50R)
 - **37/** __ Terra Red (NCS S4040-Y70R)
 - **47/** __ Green L1 (NCS S 4005-G80Y)
- LED Colour Temperature**
- /1_ 2700 K CRI >90 2662 lm 121 lm/W

- Control**
- 1805** __ / __ **3**
1-10V
- 1805** __ / __ **D**
Push; DALI-2
- 1805** __ / __ **Z**
Casambi

- Finishes (rings and canopy)**
- **Black** (NCS S 8500-N)

Materials
Upper ring: Aluminum. Bottom ring: Brass.
Diffuser: PC- Polycarbonate. Threads: PES FR.

Light Source and electronics
1 x LED STRIP 22W 48V
Constant Voltage 48V
90-305Vac 50/60Hz

Packaging
1 Box 0,62 x 0,62 x 0,12 m
Vol 0,0461 m³
Gross weight 7,3 Kg Net weight 5,1 Kg




Multi-volt **Dimmer**

Select Electrical connection

- _10 Surface
- _24 Built-in S
- _31 Remote Micro

1810



- Finishes (threads)**
- **24/** __ Beige M1 (NCS S 2005-Y50R)
 - **37/** __ Terra Red (NCS S4040-Y70R)
 - **47/** __ Green L1 (NCS S 4005-G80Y)
- LED Colour Temperature**
- /1_ 2700 K CRI >90 2662 lm 121 lm/W

- Control**
- 1810** __ / __ **3**
1-10V
- 1810** __ / __ **D**
Push; DALI-2
- 1810** __ / __ **Z**
Casambi

- Finishes (rings and canopy)**
- **Black** (NCS S 8500-N)

Materials
Upper ring: Aluminum. Bottom ring: Brass.
Diffuser: PC- Polycarbonate. Threads: PES FR.

Light Source and electronics
1 x LED STRIP 22W 48V
Constant Voltage 48V
90-305Vac 50/60Hz

Packaging
1 Box 0,62 x 0,62 x 0,12 m
Vol 0,0461 m³
Gross weight 7,6 Kg Net weight 5,4 Kg




Multi-volt **Dimmer**

Select Electrical connection

- _10 Surface
- _24 Built-in S
- _31 Remote Micro

1815



Finishes (threads)

- 24/ _ _ Beige M1 (NCS S 2005-Y50R)
- 37/ _ _ Terra Red (NCS S4040-Y70R)
- 47/ _ _ Green L1 (NCS S 4005-G80Y)

LED Colour Temperature

/1_ 2700 K CRI >90 3993 lm 121 lm/W

Control

1815 _ _ / _ 3
1-10V

1815 _ _ / _ D
Push; DALI-2

1815 _ _ / _ Z
Casambi

Finishes (rings and canopy)

- Black (NCS S 8500-N)

Materials


Upper ring: Aluminum. Bottom ring: Brass.
Diffuser: PC- Polycarbonate. Threads: PES FR.

Light Source and electronics

1 x LED STRIP 33W 48V
Constant Voltage 48V
90-305Vac 50/60Hz

Packaging

1 Box 0,62 x 0,62 x 0,12 m
Vol 0,0461 m³
Gross weight 8,4 Kg Net weight 6,2 Kg




Multi-volt Dimmer



Select Electrical connection

- _10 Surface
- _24 Built-in S
- _31 Remote Micro

1820

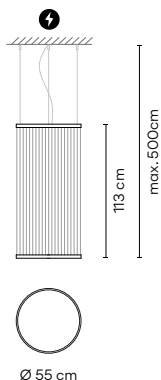

Finishes (threads)

- 24/ _ _ Beige M1 (NCS S 2005-Y50R)
- 37/ _ _ Terra Red (NCS S4040-Y70R)
- 47/ _ _ Green L1 (NCS S 4005-G80Y)

LED Colour Temperature

/1_ 2700 K CRI >90 3993 lm 121 lm/W

Control

1820 _ _ / _ 3
1-10V

1820 _ _ / _ D
Push; DALI-2

1820 _ _ / _ Z
Casambi

Finishes (rings and canopy)

- Black (NCS S 8500-N)

Materials


Upper ring: Aluminum. Bottom ring: Brass.
Diffuser: PC- Polycarbonate. Threads: PES FR.

Light Source and electronics

1 x LED STRIP 33W 48V
Constant Voltage 48V
90-305Vac 50/60Hz

Packaging

1 Box 0,62 x 0,62 x 0,12 m
Vol 0,0461 m³
Gross weight 8,8 Kg Net weight 6,6 Kg




Multi-volt Dimmer



Select Electrical connection

- _10 Surface
- _24 Built-in S
- _31 Remote Micro

1825

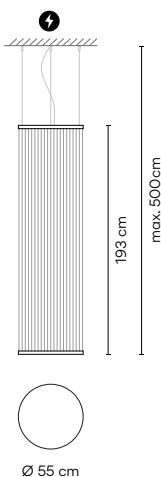

Finishes (threads)

- 24/ _ _ Beige M1 (NCS S 2005-Y50R)
- 37/ _ _ Terra Red (NCS S4040-Y70R)
- 47/ _ _ Green L1 (NCS S 4005-G80Y)

LED Colour Temperature

/1_ 2700 K CRI >90 3993 lm 121 lm/W

Control

1825 _ _ / _ 3
1-10V

1825 _ _ / _ D
Push; DALI-2

1825 _ _ / _ Z
Casambi

Finishes (rings and canopy)

- Black (NCS S 8500-N)

Materials


Upper ring: Aluminum. Bottom ring: Brass.
Diffuser: PC- Polycarbonate. Threads: PES FR.

Light Source and electronics

1 x LED STRIP 33W 48V
Constant Voltage 48V
90-305Vac 50/60Hz

Packaging

1 Box 0,62 x 0,62 x 0,12 m
Vol 0,0461 m³
Gross weight 9,2 Kg Net weight 7 Kg





Multi-volt Dimmer



Select Electrical connection

- _10 Surface
- _24 Built-in S
- _31 Remote Micro

1830



Finishes (threads)
 ● 24/ __ Beige M1 (NCS S 2005-Y50R)
 ● 37/ __ Terra Red (NCS S4040-Y70R)
 ● 47/ __ Green L1 (NCS S 4005-G80Y)

LED Colour Temperature
 /1_ 2700 K CRI >90 6050 lm 121 lm/W

Control
 1830 __ / _ 3
 1-10V
 1830 __ / _ D
 Push; DALI-2
 1830 __ / _ Z
 Casambi

Finishes (rings and canopy)
 ● Black (NCS S 8500-N)

Materials
 Upper ring: Aluminum. Bottom ring: Brass.
 Diffuser: PC- Polycarbonate. Threads: PES FR.



Packaging
 1 Box 0,93 x 0,93 x 0,120 m
 Vol 0,1037 m³
 Gross weight 13,5 Kg Net weight 9,5 Kg

Light Source and electronics
 1 x LED STRIP 50W 48V
 Constant Voltage 48V
 90~305Vac 50/60Hz

LED IP20 CE EAC
 Multi-volt Dimmer

Select Eleltrical connection
 _10 Surface
 _24 Built-in S
 _31 Remote Micro

1835



Finishes (threads)
 ● 24/ __ Beige M1 (NCS S 2005-Y50R)
 ● 37/ __ Terra Red (NCS S4040-Y70R)
 ● 47/ __ Green L1 (NCS S 4005-G80Y)

LED Colour Temperature
 /1_ 2700 K CRI >90 6050 lm 121 lm/W

Control
 1835 __ / _ 3
 1-10V
 1835 __ / _ D
 Push; DALI-2
 1835 __ / _ Z
 Casambi

Finishes (rings and canopy)
 ● Black (NCS S 8500-N)

Materials
 Upper ring: Aluminum. Bottom ring: Brass.
 Diffuser: PC- Polycarbonate. Threads: PES FR.



Packaging
 1 Box 0,93 x 0,93 x 0,120 m
 Vol 0,1037 m³
 Gross weight 14,1 Kg Net weight 10,1 Kg

Light Source and electronics
 1 x LED STRIP 50W 48V
 Constant Voltage 48V
 90~305Vac 50/60Hz

LED IP20 CE EAC
 Multi-volt Dimmer

Select Eleltrical connection
 _10 Surface
 _24 Built-in S
 _31 Remote Micro

1840



Finishes (threads)
 ● 24/ __ Beige M1 (NCS S 2005-Y50R)
 ● 37/ __ Terra Red (NCS S4040-Y70R)
 ● 47/ __ Green L1 (NCS S 4005-G80Y)

LED Colour Temperature
 /1_ 2700 K CRI >90 9196 lm 121 lm/W

Control
 1840 __ / _ 3
 1-10V
 1840 __ / _ D
 Push; DALI-2
 1840 __ / _ Z
 Casambi

Finishes (rings and canopy)
 ● Black (NCS S 8500-N)

Materials
 Upper ring: Aluminum. Bottom ring: Brass.
 Diffuser: PC- Polycarbonate. Threads: PES FR.

Packaging
 1 Box 1,35 x 1,35 x 0,120 m
 Vol 0,2187 m³
 Gross weight 19 Kg Net weight 13 Kg

Light Source and electronics
 1 x LED STRIP 76W 48V
 Constant Voltage 48V
 90~305Vac 50/60Hz


LED IP20 CE EAC
 Multi-volt Dimmer

Select Eleltrical connection
 _10 Surface
 _24 Built-in S
 _31 Remote Micro

1160 | 10 | /1A | 18

Model | Finish | LED Colour Temperature | Control | Electrical connection

1845

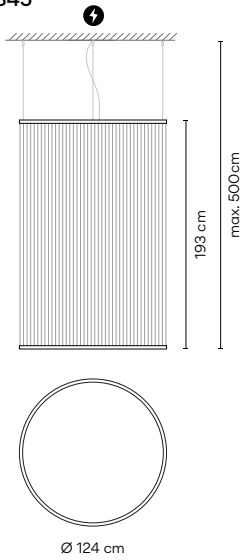

- Finishes (threads)**
- 24/ _ _ Beige M1 (NCS S 2005-Y50R)
 - 37/ _ _ Terra Red (NCS S4040-Y70R)
 - 47/ _ _ Green L1 (NCS S 4005-G80Y)

LED Colour Temperature
/1_ 2700 K
CRI >90 9196 lm 121 lm/W

- Control**
- 1845 _ _ / _ 3 1-10V
 - 1845 _ _ / _ D Push; DALI-2
 - 1845 _ _ / _ Z Casambi

- Finishes (rings and canopy)**
- Black (NCS S 8500-N)

Materials

Upper ring: Aluminum. Bottom ring: Brass.
Diffuser: PC- Polycarbonate. Threads: PES FR.

Light Source and electronics

1 x LED STRIP 76W 48V
Constant Voltage 48V
90-305Vac 50/60Hz

Packaging


1 Box 1,35 x 1,35 x 0,120 m
Vol 0,2187 m³
Gross weight 19,9 Kg Net weight 13,9 Kg

LED IP20 CE EAC


Multi-volt Dimmer

Select Electrical connection

- _10 Surface
- _24 Built-in S
- _31 Remote Micro

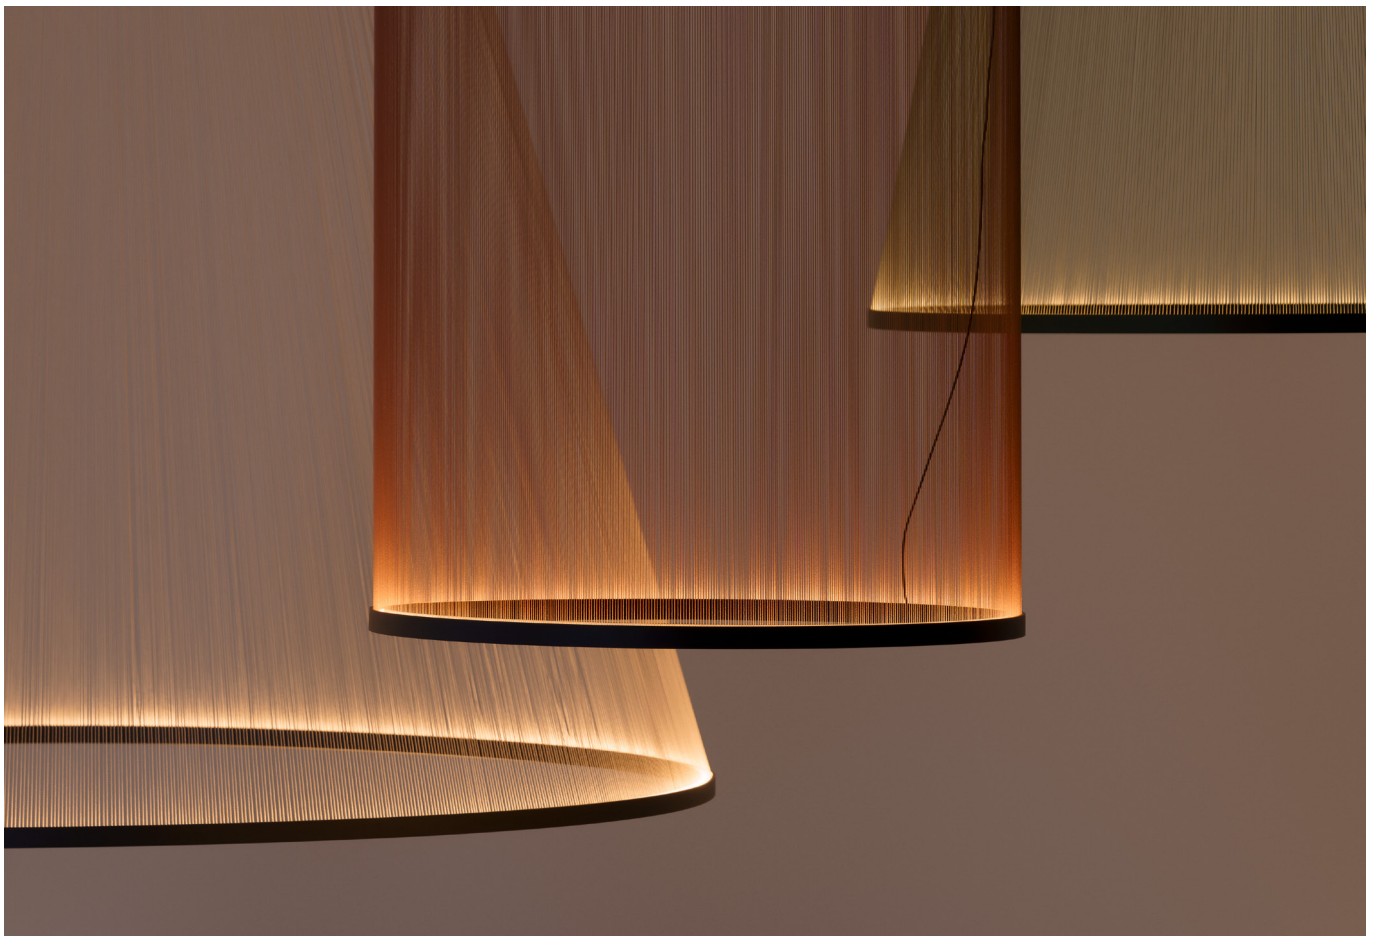

1850



Finishes (threads)
 ● 24/ __ Beige M1 (NCS S 2005-Y50R)
 ● 37/ __ Terra Red (NCS S4040-Y70R)
 ● 47/ __ Green L1 (NCS S 4005-G80Y)

LED Colour Temperature
 /1_ 2700 K CRI >90 3993 lm 121 lm/W

Control
 1850 __ / _ 3
 1-10V
 1850 __ / _ D
 Push; DALI-2
 1850 __ / _ Z
 Casambi

Finishes (rings and canopy)
 ● Black (NCS S 8500-N)

Materials
 Upper ring: Aluminum. Bottom ring: Brass.
 Diffuser: PC- Polycarbonate. Threads: PES FR.

Light Source and electronics
 1 x LED STRIP 33W 48V
 Constant Voltage 48V
 90-305Vac 50/60Hz


Packaging
 1 Box 0,62 x 0,62 x 0,121 m
 Vol 0,0461 m³
 Gross weight 7,9 Kg Net weight 5,7 Kg



Multi-volt Dimmer

Select Electrical connection
 _10 Surface
 _24 Built-in S
 _31 Remote Micro

1855

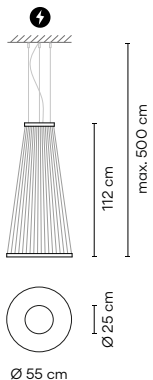

Finishes (threads)
 ● 24/ __ Beige M1 (NCS S 2005-Y50R)
 ● 37/ __ Terra Red (NCS S4040-Y70R)
 ● 47/ __ Green L1 (NCS S 4005-G80Y)

LED Colour Temperature
 /1_ 2700 K CRI >90 3993 lm 121 lm/W

Control
 1855 __ / _ 3
 1-10V
 1855 __ / _ D
 Push; DALI-2
 1855 __ / _ Z
 Casambi

Finishes (rings and canopy)
 ● Black (NCS S 8500-N)

Materials
 Upper ring: Aluminum. Bottom ring: Brass.
 Diffuser: PC- Polycarbonate. Threads: PES FR.

Light Source and electronics
 1 x LED STRIP 33W 48V
 Constant Voltage 48V
 90-305Vac 50/60Hz


Packaging
 1 Box 0,62 x 0,62 x 0,121 m
 Vol 0,0461 m³
 Gross weight 8,3 Kg Net weight 6,1 Kg



Multi-volt Dimmer

Select Electrical connection
 _10 Surface
 _24 Built-in S
 _31 Remote Micro

1860

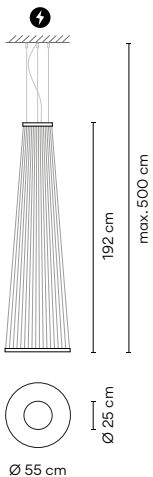

Finishes (threads)
 ● 24/ __ Beige M1 (NCS S 2005-Y50R)
 ● 37/ __ Terra Red (NCS S4040-Y70R)
 ● 47/ __ Green L1 (NCS S 4005-G80Y)

LED Colour Temperature
 /1_ 2700 K CRI >90 3993 lm 121 lm/W

Control
 1860 __ / _ 3
 1-10V
 1860 __ / _ D
 Push; DALI-2
 1860 __ / _ Z
 Casambi

Finishes (rings and canopy)
 ● Black (NCS S 8500-N)

Materials
 Upper ring: Aluminum. Bottom ring: Brass.
 Diffuser: PC- Polycarbonate. Threads: PES FR.

Light Source and electronics
 1 x LED STRIP 33W 48V
 Constant Voltage 48V
 90-305Vac 50/60Hz


Packaging
 1 Box 0,62 x 0,62 x 0,121 m
 Vol 0,0461 m³
 Gross weight 8,7 Kg Net weight 6,5 Kg



Multi-volt Dimmer

Select Electrical connection
 _10 Surface
 _24 Built-in S
 _31 Remote Micro

1865

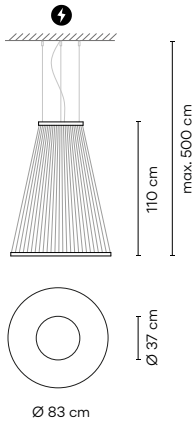

- Finishes (threads)**
- 24/ _ Beige M1 (NCS S 2005-Y50R)
 - 37/ _ Terra Red (NCS S4040-Y70R)
 - 47/ _ Green L1 (NCS S 4005-G80Y)
- LED Colour Temperature**
- /1_ 2700 K CRI >90 6050 lm 121 lm/W

- Control**
- 1865 _ / _ 3
1-10V
- 1865 _ / _ D
Push; DALI-2
- 1865 _ / _ Z
Casambi

- Finishes (rings and canopy)**
- Black (NCS S 8500-N)

Materials
Upper ring: Aluminum. Bottom ring: Brass.
Diffuser: PC- Polycarbonate. Threads: PES FR.

Light Source and electronics
1 x LED STRIP 50W 48V
Constant Voltage 48V
90~305Vac 50/60Hz

Packaging
1 Box 0,93 x 0,93 x 0,120 m
Vol 0,1037 m³
Gross weight 11,8 Kg Net weight 8,8 Kg




Multi-volt Dimmer

Select Electrical connection

_10 Surface
_24 Built-in S
_31 Remote Micro

1870

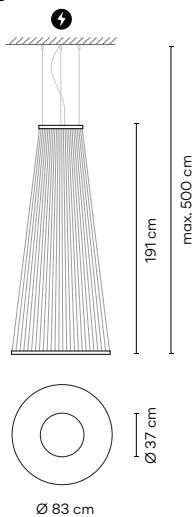

- Finishes (threads)**
- 24/ _ Beige M1 (NCS S 2005-Y50R)
 - 37/ _ Terra Red (NCS S4040-Y70R)
 - 47/ _ Green L1 (NCS S 4005-G80Y)
- LED Colour Temperature**
- /1_ 2700 K CRI >90 6050 lm 121 lm/W

- Control**
- 1870 _ / _ 3
1-10V
- 1870 _ / _ D
Push; DALI-2
- 1870 _ / _ Z
Casambi

- Finishes (rings and canopy)**
- Black (NCS S 8500-N)

Materials
Upper ring: Aluminum. Bottom ring: Brass.
Diffuser: PC- Polycarbonate. Threads: PES FR.

Light Source and electronics
1 x LED STRIP 50W 48V
Constant Voltage 48V
90~305Vac 50/60Hz

Packaging
1 Box 0,93 x 0,93 x 0,120 m
Vol 0,1037 m³
Gross weight 12,4 Kg Net weight 9,4 Kg




Multi-volt Dimmer

Select Electrical connection

_10 Surface
_24 Built-in S
_31 Remote Micro

1875

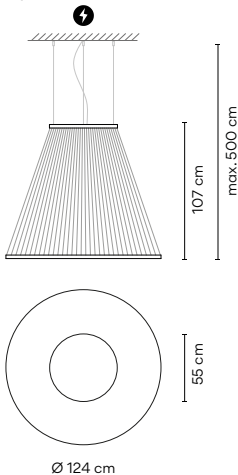

- Finishes (threads)**
- 24/ _ Beige M1 (NCS S 2005-Y50R)
 - 37/ _ Terra Red (NCS S4040-Y70R)
 - 47/ _ Green L1 (NCS S 4005-G80Y)
- LED Colour Temperature**
- /1_ 2700 K CRI >90 9196 lm 121 lm/W

- Control**
- 1875 _ / _ 3
1-10V
- 1875 _ / _ D
Push; DALI-2
- 1875 _ / _ Z
Casambi

- Finishes (rings and canopy)**
- Black (NCS S 8500-N)

Materials
Upper ring: Aluminum. Bottom ring: Brass.
Diffuser: PC- Polycarbonate. Threads: PES FR.

Light Source and electronics
1 x LED STRIP 76W 48V
Constant Voltage 48V
90~305Vac 50/60Hz

Packaging
1 Box 1,35 x 1,35 x 0,12 m
Vol 0,2187 m³
Gross weight 15,9 Kg Net weight 11,9 Kg




Multi-volt Dimmer

Select Electrical connection

_10 Surface
_24 Built-in S
_31 Remote Micro

1880

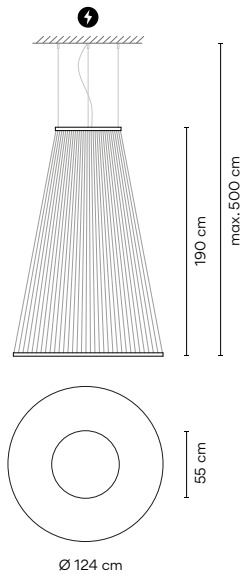

Finishes (threads) ● 24/ _ Beige M1 (NCS S 2005-Y50R) ● 37/ _ Terra Red (NCS S4040-Y70R) ● 47/ _ Green L1 (NCS S 4005-G80Y)	LED Colour Temperature /1_ 2700 K CRI >90 9196 lm 121lm/W	Control 1880 _ _ / _ 3 1-10V 1880 _ _ / _ D Push; DALI-2 1880 _ _ / _ Z Casambi
Finishes (rings and canopy) ● Black (NCS S 8500-N)	Materials Upper ring: Aluminum. Bottom ring: Brass. Diffuser: PC- Polycarbonate. Threads: PES FR.	Packaging 1 Box 1,35 x 1,35 x 0,12 m Vol 0,2187 m ³ Gross weight 16,8 Kg Net weight 12,8 Kg
Light Source and electronics 1 x LED STRIP 76W 48V Constant Voltage 48V 90-305Vac 50/60Hz	LED IP20 Multi-volt Dimmer	

Select Electrical connection
 _10 Surface
 _24 Built-in S
 _31 Remote Micro

Electrical connection options

Choose your preferred installation option according to your needs.

Drop ceiling

Regular ceiling

_31 Remote Micro



Ø 3 cm
 height 7 cm
 for plaster ceilings.
 Black finish.

_24 Built-in S



Ø 8 cm
 height 6 cm
 black finish.

_10 Surface



Ø 25,5 cm
 height 4,5 cm
 black finish.



Ø 37,5 cm
 height 4,5 cm
 black finish.



Flamingo Mini

Design by Antoni Arola

Flamingo Mini creates multi-layered silhouettes with an avant-garde, intriguing aesthetic. This hanging lamp recalls a bird hovering overhead, bringing an intimate ambience as it casts diffuse gradations of soothing light through its translucent diffuser.

Pendants

1575

Ø 45 cm

1580

Ø 9 cm

1585

Ø 45 cm

1590

Ø 45 cm

Option A

Option B


Option C



Three options of installation



1575



Finishes
 ● 11/ _ _ Black (NCS S 8500-N)

LED Colour Temperature
 /1 _ 2700 K CRI >90 726 lm 124 lm/W

Control
 1575 _ _ / _ 1 DALI-2

1575 _ _ / _ B Push; 1-10V
 1575 _ _ / _ Z Casambi

Materials
 Diffuser: PMMA. Rods: Stainless steel. Body: Aluminum. Canopy: ABS.

Light Source and electronics
 2 x LED 3W 175 mA
 Constant current 350 mA
 110-240Vac 50/60Hz


Packaging
 2 Boxes
 Box 1: 0,07 x 0,07 x 1,25 m
 Box 2: 0,51 x 0,51 x 0,16 m
 Total Vol 0,0478 m³
 Gross weight 5,5 Kg Net weight 4 Kg

Notes
 Additional cable length personalisation 16,00 €/m

LED IP20 CE EAC Bi-volt

Select Electrical connection
 _10 Surface
 _23 Built-in XS

1580



Finishes
 ● 11/ _ _ Black (NCS S 8500-N)

LED Colour Temperature
 /1 _ 2700 K CRI >90 726 lm 124 lm/W

Control
 1580 _ _ / _ 1 DALI-2

1580 _ _ / _ B Push; 1-10V
 1580 _ _ / _ Z Casambi

Materials
 Diffuser: PMMA. Rods: Stainless steel. Body: Aluminum. Canopy: ABS.

Light Source and electronics
 2 x LED 3W 175 mA
 Constant current 350 mA
 110-240Vac 50/60Hz


Packaging
 2 Boxes
 Box 1: 0,068 x 0,068 x 1,25 m
 Box 2: 0,20 x 0,21 x 0,13 m
 Total Vol 0,0112 m³
 Gross weight 4 Kg Net weight 3 Kg

Notes
 Additional cable length personalisation 16,00 €/m

LED IP20 CE EAC Bi-volt

Select Electrical connection
 _10 Surface
 _23 Built-in XS

1585



Finishes
 ● 11/ _ _ Black (NCS S 8500-N)

LED Colour Temperature
 /1 _ 2700 K CRI >90 726 lm 124 lm/W

Control
 1585 _ _ / _ 1 DALI-2

1585 _ _ / _ B Push; 1-10V
 1585 _ _ / _ Z Casambi

Materials
 Diffuser: PMMA. Rods: Stainless steel. Body: Aluminum. Canopy: ABS.

Light Source and electronics
 2 x LED 3W 175 mA
 Constant current 350 mA
 110-240Vac 50/60Hz


Packaging
 2 Boxes
 Box 1: 0,07 x 0,07 x 1,25 m
 Box 2: 0,51 x 0,51 x 0,16 m
 Total Vol 0,0478 m³
 Gross weight 5,5 Kg Net weight 4 Kg

Notes
 Additional cable length personalisation 16,00 €/m

LED IP20 CE EAC Bi-volt

Select Electrical connection
 _10 Surface
 _23 Built-in XS

1590



Finishes
 ● 11/ _ _ Black (NCS S 8500-N)

LED Colour Temperature
 /1 _ 2700 K CRI>90 1152 lm 132 lm/W

Control
 1590 _ _ / _ 1 DALI-2

1590 _ _ / _ B Push; 1-10V

1590 _ _ / _ Z Casambi

Materials
 Diffuser: PMMA. Rods: Stainless steel.
 Body: Aluminum. Canopy: ABS.

Light Source and electronics
 3 x LED COB 3W 185 mA
 Constant Current 550 mA
 110-240Vac 50/60Hz

Packaging
 2 Boxes
 Box 1: 0,07 x 0,07 x 1,60 m
 Box 2: 0,51 x 0,51 x 0,16 m
 Total Vol 0,0494 m³
 Gross weight 6,5 Kg Net weight 5 Kg

Notes
 Additional cable length personalisation 16,00 €/m

Select Electrical connection
 _10 Surface
 _23 Built-in XS


Electrical connection options

Choose your preferred installation option according to your needs.

Drop ceiling

Regular ceiling

_23 Built-in XS



Ø 8 cm
 height 6 cm
 black finish.

_10 Surface



Ø 10 cm
 black finish.




Item coding

Some pendant models offer different electrical connection typology, these will require additional coding.

ITEM CODING

Reference

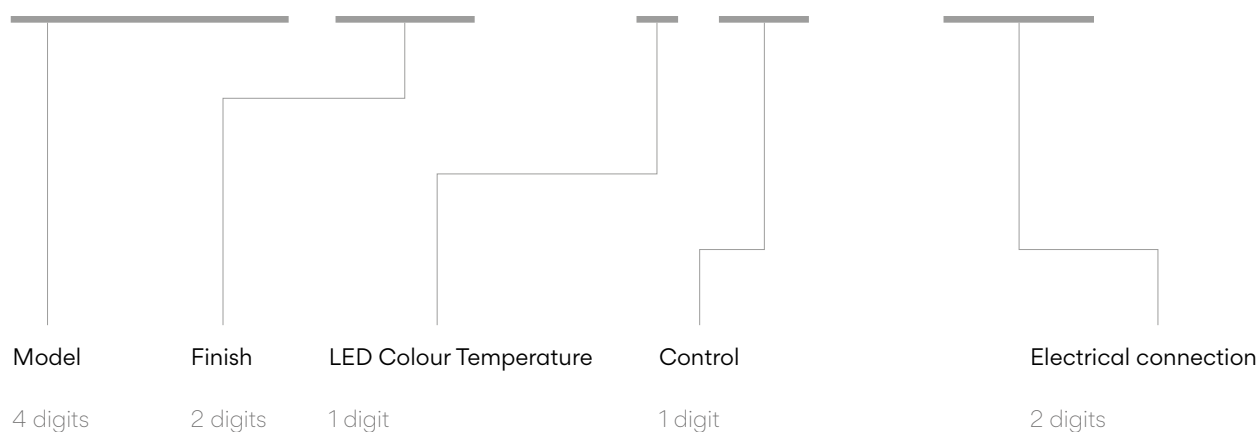

Type	Model
0 Without LED	0 Basic
1 2700 K	1 Micro
2 3000 K	2 XXS
3 3500 K	3 XS
4 4000 K	4 S
7 2200 K	5 M
8 Tunable White	6 L
9 Tunable Red	8 Free wire
A TW + RGB	9 Mud kit
B 2700 + RGB	
C 3000 + RGB	
F Dim to Warm	
0 On/ Off	
1 DALI	
2 0-10V	
3 1-10V	
4 TRIAC	
5 Push	
6 Sensor	
7 Lutron	
8 Push 2	
A Push; 1-10V; DALI	
B Push; 1-10V	
C 1-10V; DALI	
D Push; DALI	
E Casambi PTP; On/ Off	
F Simultaneous line Push 1-10V; DALI; Casambi	
M Without driver	
W Wiz	
Y Protopixel	
Z Casambi *	

* Casambi refers to wireless dimming solutions. Ask for more information.

Should you need a non-standard product. Please, request sales conditions.

Very important

Vibia Lighting S.L.U. has the right to change any model or finish of the products included in the picture catalogue without any previous notice.

Vibia Lighting, S.L.U.

Office

Progrés 4-6.
08850 Gavà (Barcelona).
International Tel +34 934 796 971.

customer.service@vibia.com
vibia.com

COPYRIGHT© VIBIA LIGHTING S.L.U. ALL RIGHTS RESERVED.

